


MARINA PTS-MA2

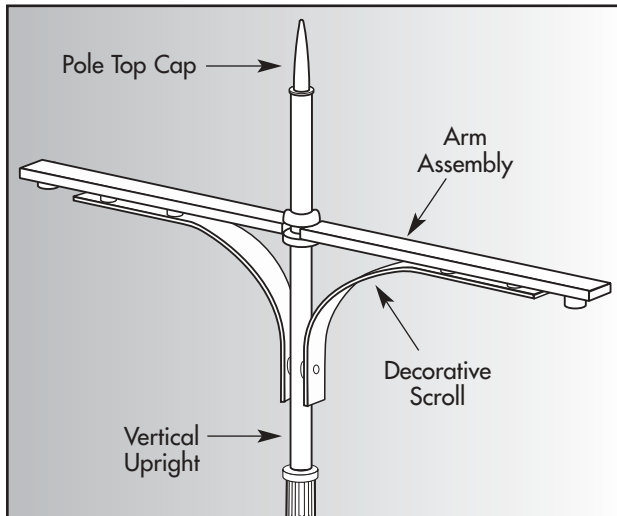

SPECIFICATIONS

Vertical Upright: Vertical uprights are manufactured from 3" O.D. x .188" steel tubing, 32,000 psi strength. A 1-1/4" diameter deburred hole is provided at a location aligning with arm termination for luminaire wiring. Steel rivnuts are factory installed in the vertical upright where required for arm mounting screws.

Luminaire Arm Assemblies: Luminaire arms are manufactured from .120" wall rectangular steel 1-1/2" x 3" tubing with a minimum yield strength of 42,000 psi. The arm is mounted to the vertical upright using a three-part cast aluminum clamp-on bolted bracket. A stainless steel screw is provided as an anti-rotation lock. The rectangular tube is mounted to the aluminum casting with two stainless steel socket button head cap screws. The decorative steel scroll is constructed of 1/4" x 1-3/4" rolled plate and field installed with stainless steel fasteners.

Luminaire Mounting: The "D2" luminaire mounting option is supplied with a 1-1/2" female threaded coupling welded 1" from the end of the arm pointing down. A 1-1/2" male threaded coupling is provided to adapt to female hub luminaires. A stainless steel hex drive cup point set screw is provided in the female coupling as an anti-rotation locking device. Open ends of the arms are provided with black polypropylene flat push-in caps. Arms may also be specified with "T2" - 2-3/8" O.D. or "T3" - 3" O.D. tenon for top mounted luminaires. These tenons are located 1" from the end of the arm.

Pole Top Assembly Mounting to Pole: Pole top assemblies are to be mounted to City Quartz poles with the "PQ" 2-3/8" O.D. x 12" tenon. This must be ordered with the pole to accommodate a pole top assembly. The vertical upright of the pole top assembly is provided with two sets of four stainless steel hex drive cup point set screws that secure the pole top assembly to the pole. These screws also allow for leveling of the vertical upright.

Pole Top Caps: Pole top cap options "B" - Ball and "D" - Half Dome are manufactured of spun aluminum components formed together to make a single assembly. The "S" - Spike Cap is a one-piece cast aluminum part. These three options are mounted to the pole top assembly with three stainless steel fasteners. The "F" - Flat Top Cap is a one-piece push-in style polypropylene part that is available in black finish only.

Finishes: The finish for the pole top assemblies is polyester powder applied coating in accordance with Valmont Industries' Specifications. Pole top assemblies may have different finishes on vertical upright, arm assembly (which includes the decorative scroll) and pole top cap.

CATALOG LOGIC

POLE TOP ASSEMBLY P T	MATERIAL S	SERIES	NUMBER OF ARMS	LUMINAIRE MOUNTING	VERTICAL UPRIGHT FINISH V	ARM ASSEMBLY FINISH A	POLE TOP CAP	POLE TOP CAP FINISH
POLE TOP ASSEMBLY PT = Pole Top Assembly	MATERIAL S = Steel	SERIES MA2 = Marina #2 3' - 0" Arm MA2A = Marina #2 5' - 0" Arm	NUMBER OF ARMS 1 = Single 2 = Double @ 180	LUMINAIRE MOUNTING T2 = Tenon Up 2-3/8" O.D. x 3" T3 = Tenon Up 3" O.D. x 3" D2 = Threaded Hub Down 1-1/2" NPS Female with Male Adapter ST = Special Mounting (Please Specify)			POLE TOP CAP B = Ball S = Spike D = Half Dome F = Flat (BK Only)	
						VERTICAL UPRIGHT, ARM ASSEMBLY, POLE TOP CAP FINISH ①		
						WH = White SL = Silver HG = Hunter Green BK = Black BR = Burgandy AB = Azure Blue MB = Medium Bronze RD = Red BV = Dark Blue Violet SG = Slate Grey CG = Copper Green SC = Special Color ST = Sandstone BG = Blue Green (Please Specify)		



① Decorative scroll is finished in the color selection for the arm assembly.



STEEL POLE TOP ASSEMBLIES MARINA SERIES "PTS-MA2" & "PTS-MA2A"





POLE TOP CAP AND LUMINAIRE MOUNTING OPTIONS

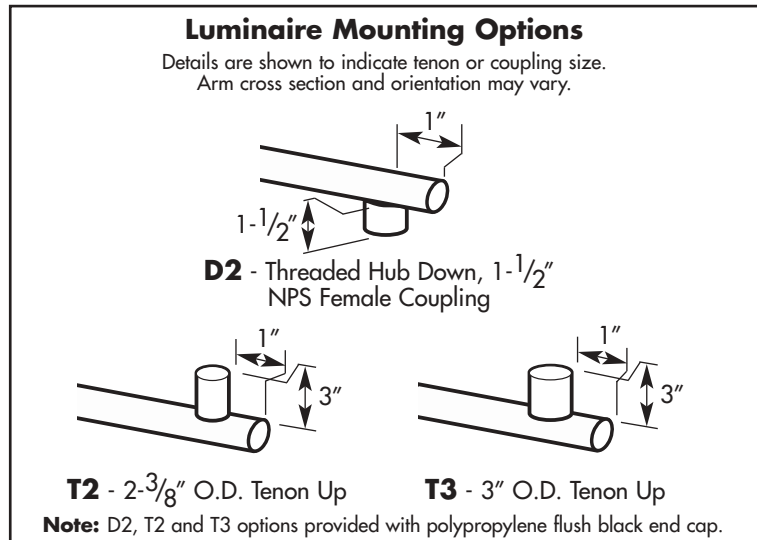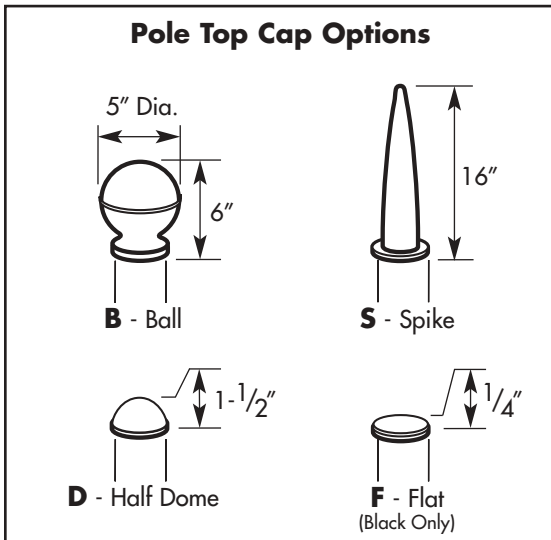

STANDARD DIMENSIONAL AND LOAD DATA

Single Arm

Double Arm 2 @ 180°

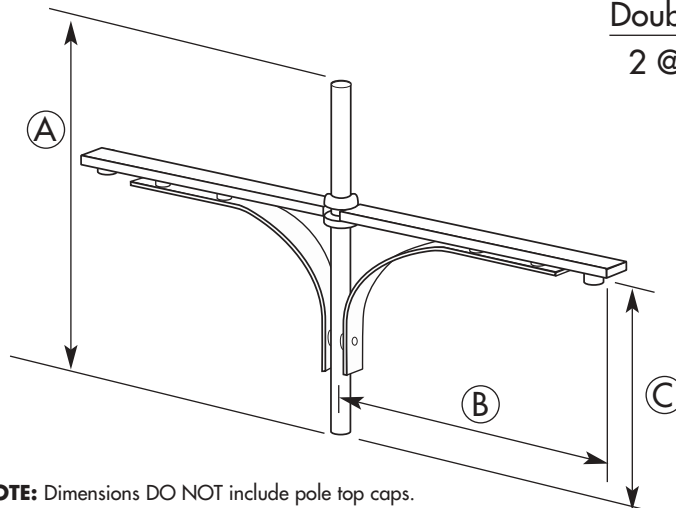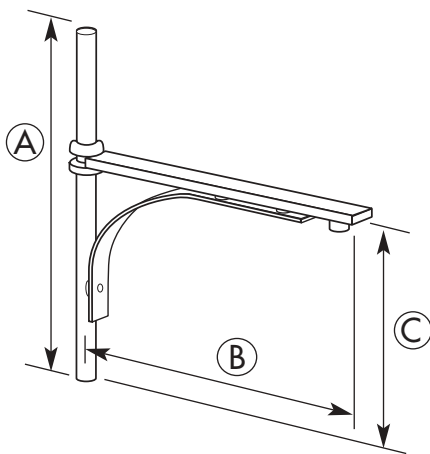

NOTE: Dimensions DO NOT include pole top caps.

POLE TOP SERIES	DIMENSIONS			LOAD DATA	
	(A) OVERALL HEIGHT	(B) HORIZ. DISTANCE TO LUMINAIRE	(C) HEIGHT TO LUMINAIRE ABOVE POLE TOP	POLE TOP ASSEMBLY EPA (SQ FT)	POLE TOP ASSEMBLY WEIGHT (LBS)
Single Arm PTS-MA2-1-(M)-(VF)-(AF)-(TC)-(TF)	4' - 6"	3' - 2"	3' - 0"	2.6	58
Double Arm (2 @ 180 Degrees) PTS-MA2-2-(M)-(VF)-(AF)-(TC)-(TF)	4' - 6"	3' - 2"	3' - 0"	3.7	85
Single Arm PTS-MA2A-1-(M)-(VF)-(AF)-(TC)-(TF)	4' - 6"	5' - 0"	3' - 0"	3.0	64
Double Arm (2 @ 180 Degrees) PTS-MA2A-2-(M)-(VF)-(AF)-(TC)-(TF)	4' - 6"	5' - 0"	3' - 0"	4.5	97

"PTS" Steel Pole Top Assemblies Ordering Notes:

- 1) Replace (M) with Luminaire Mounting Selection, (VF) with Vertical Upright Finish Selection, (AF) with Arm Assembly Finish Selection, (TC) with Pole Top Cap Selection and (TF) with Pole Top Cap Finish Selection. See Catalog Logic for choices.
- 2) Pole Top Assembly weight and EPA must be added to luminaire load data to determine appropriate pole size. Pole top assemblies are designed for a maximum load of 140 lbs and 5.0 EPA per luminaire.

SPC7005 06/05